

Product Information: ER1500F

Shelter Event Equipment

**Compact
Loader**



ER1500F is a telescopic wheel loader with 1500kg loading capacity. It is well-suited for work on a farm, in a warehouse or factory, on construction sites, and for tent installation and strike.

It is highly maneuverable, secure, and offers noise reduction, increased driver comfort, and stability.

EVERUN
SINCE 2007
America

**MODEL:
EVERUN -ER1500F**

- **CUMMINS QSF2.8(48KW,TIER4) ENGINE, ITALY HYDROSTATIC**
- **DRIVING SYSTEM, INCHING FUNCTION, QUICK HITCH**
- **ENGINE, ROPS & FOPS CABIN, LUXURY CABIN INTERIOR,**
- **STANDARD BUCKET, QUICK HITCH, ELECTRIC JOYSTICK,**
- **COMFORTABLE SEAT, ADJUSTABLE STEERING WHEEL,**
- **130W HEATER, 23.5/70-16**
- **WHEEL REDUCER AXLE,DISC- BRAKE**
- **LED WORKING LIGHT**
- **LOADING WEIGHTER**
- **BOBCAT QUICK HITCH**
- **AIR SEAT WITHOUT AIR PUMP**
- **AIR CONDITIONER**
- **33*15.5-16.5 GRASS TIRES**



Shelter Structures America
405 Via Chico, Suite 1
Palos Verdes Estates, CA 90274

Shelter Structures America
257 Commonwealth Dr.
Carol Stream, IL 60188

630-915-7518/540-354-4776
Shelterstructuresamerica.com

Bobby@sheltereventequipment.com
Keith@shelterstructuresamerica.com

TECHNICAL PARAMETERS

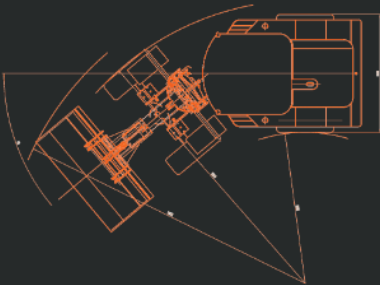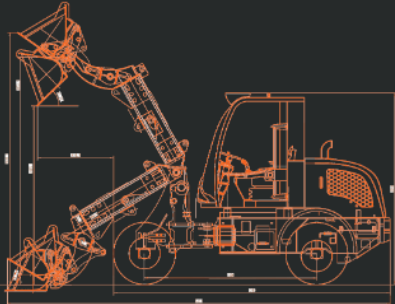

FEATURE

SIZE / DETAILS

Term No.	ER1500F
Net Weight	4000kg
Bucket Capacity By Default	0.52m ³
Optional Buckets Available (CBM) - Please Mark All Sizes Available	0.8/1.0/1.3/1.5m ³
Rated Load (Loading Capacity)	1500kg
Max.Tractive Force	33kn
Max.Breakout Force	28kn
Max.Gradeability	28°
Max. Dumping Height	3155mm
Max.Lifting Height	3813mm
Dumping Distance	1449mm
Overall Dimension (L×W×H)	7060*2150*3096mm
Engine Model by Default	Xichai A498BT1
Number of Cylinder	4
Rated Power	36.8kW



Shelter Structures America
 405 Via Chico, Suite 1
 Palos Verdes Estates, CA 90274

Shelter Structures America
 257 Commonwealth Dr.
 Carol Stream, IL 60188

630-915-7518/540-354-4776
Shelterstructuresamerica.com

Bobby@sheltereventequipment.com
Keith@shelterstructuresamerica.com